

# Climate Impact of High-Tunnel Strawberries: A Life Cycle Assessment of the Berea College Farm's Strawberry Enterprise


Final Report to the Kentucky Horticulture Council, December 16, 2021

Sean Clark  
Department of Agriculture and Natural Resources  
Berea College  
Berea, Kentucky 40404

## Introduction

Strawberries (*Fragaria x ananassa*) are among the most popular fresh fruits in the United States (USA), ranking behind only a few others, like apples and bananas, in annual per-capita consumption. Production has steadily increased to meet consumer demand and the US leads the world in strawberry production [1]. However, most commercial US production is concentrated in California, with Florida a distant second. These two states, along with North Carolina and Oregon, account for about 99% of all domestic production [2] and imports from Mexico supply most of the remaining consumer market demand. Despite this imbalanced production situation, opportunities exist for small-scale producers throughout the USA to grow and sell strawberries as demand for local and organic products continues to rise [3].

The Berea College Farm, the oldest continuously operating student educational farm in the US [4], has produced strawberries on a small scale for decades. The practices and systems used have evolved, just as they have across the entire strawberry industry. While perennial matted row culture was the norm two decades ago, the farm shifted to certified organic, annual hill production with cover-cropped furrows/paths about a decade ago (**Figure 1A**). This system also used floating row covers and drip-tape irrigation under the plastic. The cover crop was flattened to create mulched paths that minimized muddy conditions for harvesters and kept the fruit cleaner. Nevertheless, harvested amounts and quality were highly dependent upon weather conditions.

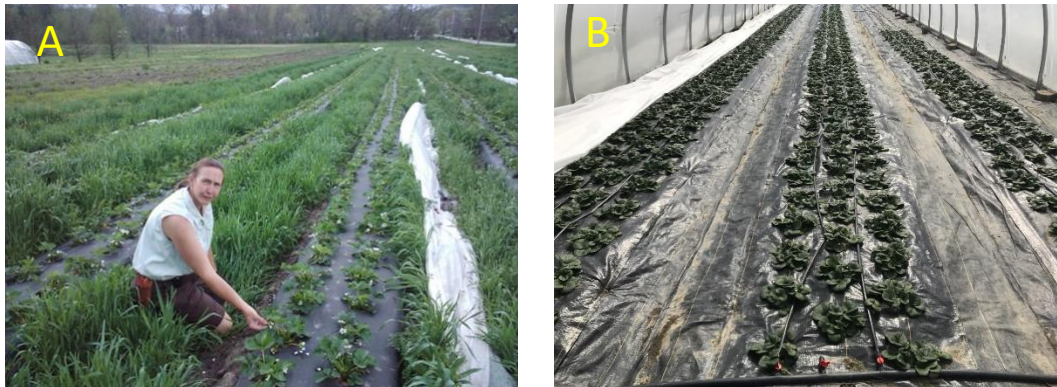

**Figure 1.** Berea College Farm has produced certified organic strawberries as annuals over the past decade using two systems: A) outdoors on raised beds with black plastic mulch and rye (*Secale cereale*) as a cover crop and mulch between the beds to protect soil and build organic matter, and more recently; B) on beds in unheated high tunnels with woven weed fabric.

Over the past several years, the farm has transitioned to growing certified organic strawberries using annual hill production in unheated high tunnels [5] with woven plastic fabric for weed management (**Figure 1B**). The plants are 'Chandler' and 'Ruby June' established from certified organic plugs sourced from North Carolina. This

system has generated higher fruit yields with fewer blemishes and longer shelf life. This approach is highly suitable for seasonal direct marketing to consumers interested in fresh, local, organic products. Most of the practices and inputs could also be compatible with and appealing to small-scale conventional operations in the region because of the potential savings in herbicide and fungicide expenses with the polyethylene protection above and the weed barrier on the ground. Of course, the high-tunnel structure is a relatively large investment for a small area that should be used and amortized over many years to justify the investment. Production costs and profitability are critical considerations for any producer, but they are not the only concerns.

Increasing public interest in the environmental impacts of food, particularly related to climate change, means that producers are giving more attention to assessing, improving and communicating their performance to consumers [6-8]. In their recent overview of the strawberry industry in USA, Samtani et al. [3] discuss the various major factors affecting production today, including the loss of methyl bromide as a soil fumigant, restrictions of pesticides, challenges of finding labor, and China's ban on importing used plastics for recycling. They predict that "[o]rganic berry production is likely to increase in the future with increasing consumer demand and the consumer's willingness to pay a premium price for organically grown produce." This obviously presents opportunities for small producers willing to pursue organic certification. But the authors also anticipate an expansion of controlled-environment agriculture (CEA) for strawberry where "fruit can be produced close to population centers and transportation costs are low."

These expected trends raise some interesting and important questions about the environmental performance of different strawberry production systems, particularly with respect to carbon emissions. Tabatabaie and Murthy [2] used life cycle assessment (LCA) methodology to compare the environmental performance of strawberry production in California, Florida, Oregon and North Carolina and found that strawberries produced in California had the lowest impacts according to most metrics due to the extremely high yields relative to other regions. More specifically, they reported that the global warming potential (GWP) of strawberries produced in California, Florida, North Carolina and Oregon was 1.75, 2.50, 5.48 and 2.21 kg CO<sub>2</sub>-eq per kilogram of strawberry, respectively. Transportation impacts were not included, but a widely cited study by Weber and Matthews [9] reported that "food miles" account for only 11% of greenhouse gas emissions for the entire US food system. Most of the impact results from actual production – specifically the material inputs and practices used.

A better understanding is needed on the environmental performance of strawberries grown using different management practices and inputs, such as organic production in high tunnels as well as large-scale CEA systems in the USA. A very wide range of strawberry yields per unit area have been reported in the literature from around the world (**Table 1**), suggesting the potential for substantial yield increases that could result not only in higher productivity but also reductions in land use. However, questions remain about the net greenhouse gas (GHG) emissions associated with these high yields generated from protected systems, such as plant factories with artificial lighting (PFAL) and tunnels. Clearly the results from Tabatabaie and Murthy [2] suggest that high yields from open-field production systems in California have superior performance over other commercial production systems. But when yields like these are obtained using greenhouses and tunnels, what are the GHG emissions per unit of output and how do they compare with other production systems? **Table 2** presents a summary of findings about GHG emissions derived from strawberry production. The data are presented as the GHG emissions (kg CO<sub>2</sub>-eq) per kg of strawberries produced. The lowest rates of GHG emissions per unit of production are from countries in the Mediterranean region, like Spain, Italy, and Turkey, using either open-field or tunnel production systems. By contrast, the highest emissions rates are from open-field and greenhouse production systems in the USA, Germany, United Kingdom and Japan.

The goal of this research is to provide a transparent assessment of the GHG emissions from small-scale, organic strawberry production using unheated high tunnels in central Kentucky. The findings offer insights into which inputs and practices have the greatest and least impacts. It also provides baseline data for potential improvements to the system as well as for comparison to large-scale commercial outdoor production and the emerging CEA systems that are now becoming more common throughout the eastern USA and will likely be competing with small-scale producers in the future.

**Table 1.** Strawberry yields (kg/ha and lbs/acre) reported in the literature from various geographic locations and under different production methods.

Open field or Protected	Conv., Organic, or Integrated	Location	Source	Yield (kg/ha)	Yield (lbs/acre)
Greenhouse - in peat	Conventional	Western Germany	Soode-Schimonsky et al. [10]	100,000	89,218
Open field	Conventional	California, USA	Samtani et al. [3]	96,047	85,680
Greenhouse	Conventional	Turkey	Yildizhan [11]	75,063	66,970
Poly-Tunnel - in peat	Conventional	Western Germany	Soode-Schimonsky et al. [10]	75,000	66,913
Open field	Conventional	California, USA	Tabatabaie and Murthy [2]	74,000	66,021
Greenhouse	Conventional	Iran	Khoshnevisan et al. [12]	72,512	64,694
Open field	Conventional	USA	Wu et al. [1]	46,558	41,533
Open field	Conventional	Spain	Mordini et al. [13]	32,802	29,265
Greenhouse	Organic	Italy	Tittarelli, et al. [14]	30,000	26,765
Open field	Conventional	Florida, USA	Samtani et al. [3]	28,249	25,200
Open field	Conventional	Italy	Valianate et al. [15]	26,500	23,643
'Protected' – in coir	Conventional	United Kingdom	Mordini et al. [13]	22,900	20,431
Open field	Conventional	Western Germany	Soode-Schimonsky et al. [10]	22,000	19,628
Open field	Conventional	South Carolina, USA	Samtani et al. [3]	21,299	19,000
'Protected' – in peat	Conventional	United Kingdom	Mordini et al. [13]	20,450	18,245
'Protected' – in soil	Conventional	United Kingdom	Mordini et al. [13]	19,318	17,235
Open field	Conventional	Switzerland	Valianate et al. [15]	18,400	16,416
Open field	Conventional	Virginia, USA	Samtani et al. [3]	16,142	14,400
Open field	Conventional	United Kingdom	Mordini et al. [13]	15,117	13,487
Open field	Conventional	North Carolina, USA	Samtani et al. [3]	13,452	12,000
Open field	Conventional	Alabama, USA	Samtani et al. [3]	11,787	10,515
Open field	Conventional	Northeast, USA	Samtani et al. [3]	11,210	10,000
Open field	Conventional	Upper Midwest, USA	Samtani et al. [3]	7,847	7,000
Open field – in peat	Conventional	United Kingdom	Mordini et al. [13]	7,100	6,334
Open field	Conventional	Southern Estonia	Soode-Schimonsky et al. [10]	7,000	6,245
Open field	Conventional	Southern Estonia	Soode-Schimonsky et al. [10]	5,500	4,907
Open field	Conventional	Iran	Khoshnevisan et al. [12]	5,476	4,886
Open field	Organic	Western Estonia	Soode-Schimonsky et al. [10]	5,000	4,461
Open field	Organic	Southern Estonia	Soode-Schimonsky et al. [10]	3,000	2,677

**Table 2.** Greenhouse gas emissions reported for strawberry production (per kg of fruit produced) reported in the literature from various geographic locations and under different production methods.

Production system	Location	GHG emissions (kg CO <sub>2</sub> -eq)	Source	Scope
Open field	N. Carolina	5.48	Tabatabaie and Murthy [2]	Cradle-to-gate
Greenhouse	Japan	3.99	Mordini et al. [13]	Cradle-to-gate (Yoshikawa et al. 2008)
Open field	Florida	2.50	Tabatabaie and Murthy [2]	Cradle-to-gate
Greenhouse, peat bag	Germany	2.50	Soode et al. [16]	Cradle-to-grave
Open field	Oregon	2.21	Tabatabaie and Murthy [2]	Cradle-to-gate
Open field	Germany	1.87	Valianate et al. [15]	Cradle-to-gate
Open field	California	1.75	Tabatabaie and Murthy [2]	Cradle-to-gate
Open field	United Kingdom	1.20	Mordini et al. [13]	Cradle-to-gate (Lillywhite 2008)
Open field	Spain	0.88	Mordini et al. [13]	Cradle-to-grave (REWE Group 2009)
High tunnel – integrated, soilless	Spain	0.87	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate
Open field – conv.	Spain	0.83	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate
Greenhouse	Iran	0.70	Khoshnevisan et al. [12]	Cradle-to-gate
Open field	Iran	0.59	Khoshnevisan et al. [12]	Cradle-to-gate
Greenhouse	Turkey	0.51	Yildizhan [11]	Cradle-to-gate
Open field	Germany	0.40	Soode et al. [16]	Cradle-to-grave
Open field	Turkey	0.24	Yildizhan [11]	Cradle-to-gate
High tunnel – conv.	Spain	0.23	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate
High tunnel – integrated	Spain	0.22	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate
Open field	Italy	0.21	Valianate et al. [15]	Cradle-to-gate
Low-tunnel – conv.	Spain	0.21	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate
Low tunnel – integrated	Spain	0.21	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate
High tunnel – conv., soilless	Spain	0.12	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate
High tunnel – organic	Spain	0.11	Romero-Gómez, and Suárez-Rey [17]	Cradle-to-gate

## Objectives

The objectives of this study are to:

1. Use life cycle assessment (LCA) methodology to quantify the global warming potential (GWP) of organic high-tunnel strawberry production in central Kentucky.
2. Compare the GWP of this strawberry production system to that of commercial production in other regions.
3. Identify the most important factors, including inputs and practices, driving the GWP of this strawberry production system and identify possible alternatives for improvement wherever possible.

## Methods

This study consists of a cradle-to-farmgate LCA analysis of GHG emissions generated from certified organic strawberries produced in an unheated high tunnel. The functional unit is 1 kg of strawberry fruit and the system boundaries are shown in **Figure 2**. The input and output data used to generate the inventory were collected from the Berea College Farm in Berea, Kentucky, USA, during the spring and summer of 2021, using management and harvest records from 2020 and 2021, interviews with the farm manager responsible for the enterprise, and field measurements.

The site had been managed using certified organic practices for over 20 years and produced a wide range of vegetables and fruits annually using high tunnels. Each high tunnel measured 30 by 6 m (95 by 20 ft) and consisted of an aluminum frame covered with attached clear polyethylene sheeting. Plants were grown directly in the soil, which was routinely amended with composts and commercial organic fertilizers. All of the high tunnels were equipped with drip irrigation and were opened and closed manually for ventilation as needed.

Strawberries occupied one or two of the eight high tunnels at the farm in any given year and required 10-11 months to complete a cycle, from transplanting to clean-up after the harvest. Woven, plastic landscaping fabric was used to cover the entire ground surface within a high tunnel before transplanting. Prior to putting the fabric down in the high tunnel, holes were burned into it with a propane torch with spacings of 30 cm (12 in) between each row on a bed and 35 cm (14 in) between plants within a row. Certified organic strawberry plugs were purchased and shipped from a nursery in North Carolina in September of each year and planted into three rows on each of three beds in each high tunnel (**Figure 1B**). Two lines of irrigation drip late were positioned on each bed between the rows. During the winter, the beds were covered with floating row cover for additional protection. Harvests began in late April and continued through early June in both years. In 2020, the strawberry cultivar 'Chandler' was grown; in 2021, 'Ruby June' was grown.


The life cycle inventory data consisted of all material inputs and activities associated with production and the yields of strawberries harvested and sold during the two years. The amount of carbon sequestered in the soil annually was estimated from soil test data collected in the top 15 cm over a 20-year period. All soil analyses were performed by A&L Western Agricultural Laboratories (Modesto, CA). The inventory data were subjected to SimaPro modeling software [18] using the DataSmart database [19], which effectively represents U.S. processes for energy, materials and wastes. The GWP, which is a standardized index of the overall amount of heat absorbed as the result of the direct and indirect GHG emissions of an action or product, is presented as kg CO<sub>2</sub>-eq per kg of marketable strawberry fruit harvested.

## Results & Discussion

An inventory of inputs for high-tunnel strawberry production on the Berea College Farm is presented in **Table 3**. This inventory was generated using farm production and harvest records, a physical inventory, along with published enterprise budgets produced by land-grant universities to verify and confirm values. A single season of strawberry production utilizes the space of a high tunnel for nearly one year (10-11 months) when pre-planting soil preparation and post-harvest clean-up are included. Thus, the season typically begins in early September and ends in early July of the following year. A flow-chart diagram illustrates the process, system boundaries, inputs, and outputs in **Figure 2**.


**Table 3.** Inventory of inputs and outputs for a life cycle assessment of high-tunnel strawberry production (outer footprint = 1,900 ft<sup>2</sup>) on the Berea College Farm.

Category	Material/Activities	Quantity/ high tunnel	Unit	Lifespan (years)
Capital Goods	Aluminum structure	2285	lb	30
	Steel screws, wire and hydrant	45	lb	30
	Plastic (6 mil poly plastic)	104	lb	5
	Plastic (PVC water line to tunnel)	30	lb	20
Strawberry Plants	Plastic trays with cells	8	lb	3
	Peat-based potting medium	14	lb	1
	Plants	30	lb	1
	Transportation from NC	292	mile	1
Production Equipment	Woven plastic landscape fabric	19	lb	5
	Irrigation header line (plastic)	15	lb	5
	Irrigation drip tape (plastic)	4	lb	2
	Irrigation valves	1	lb	2
	Spun polyester row-cover fabric (row cover)	21	lb	4
	Steel ground staples (to pin landscape fabric)	1	lb	5
	Two-wheel tractor with rotary plow	2	hour	1
	Propane burner	3	hour	1
Supplies	Water	16,000	gallon	1
	Organic fertilizer – Nature Safe 13-0-0	30	lb	1
	Gasoline (two-wheel tractor with rotary plow)	1	gallon	1
	Propane (burner)	1	gallon	1
Labor	Bed preparation (two-wheel tractor)	2	hour	1
	Compost application	3	hour	1
	Burning holes in landscape fabric	1	hour	1
	Laying and pinning landscaping fabric	2	hour	1
	Planting	32	hour	1
	Irrigating	4	hour	1
	Harvesting	90	hour	1
Clean-up	16	hour	1	
Harvest Equipment	Aluminum trays	6	lb	10
	Plastic buckets	5	lb	2
Packaging	Plastic retail container	42	lb	1
Compost	Compost – from food waste and wood chips	200	lb	1
Cold Storage	Cold storage (electricity to operate air conditioner)	12	hour	1
Soil	Carbon sequestration (CO <sub>2</sub> -eq in lbs)	(33)	lb	1
Output	Strawberry yield ‘Chandler’ (2020)	721	lb	1
	Strawberry yield ‘Ruby June’ (2021)	756	lb	1

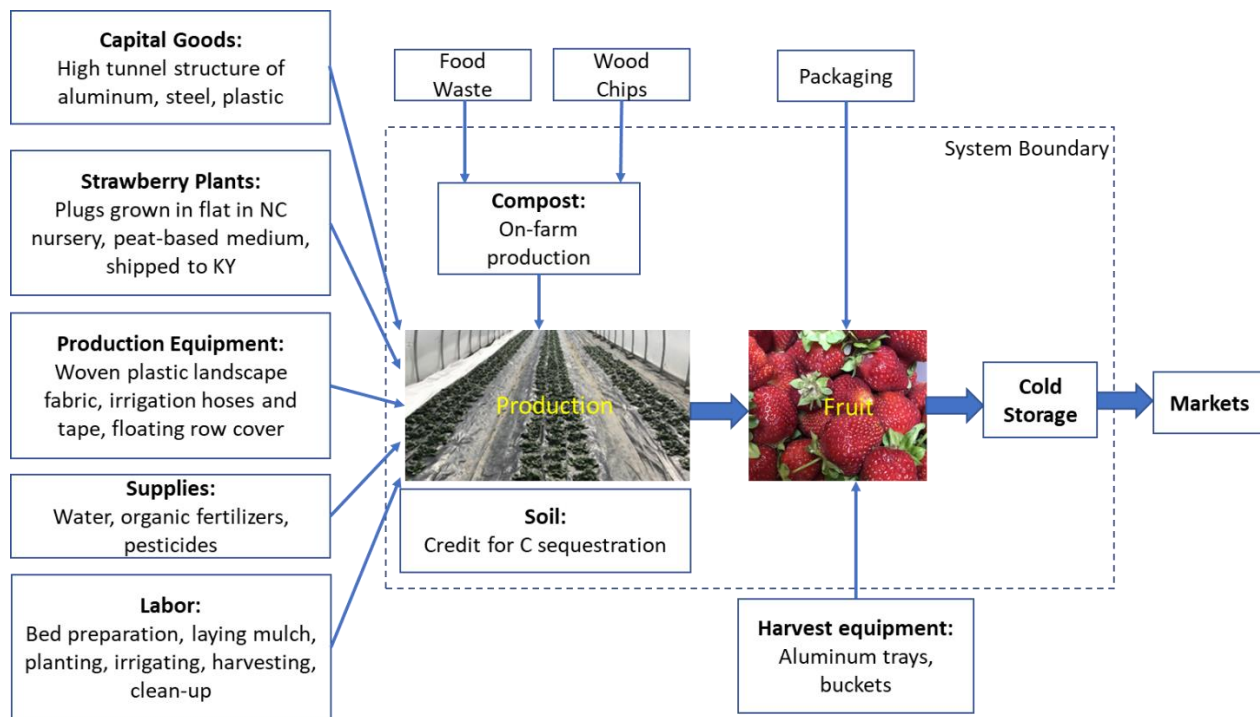

**Figure 2.** A flow-chart diagram illustrating the inputs and outputs of organic, high-tunnel strawberry production on the Berea College Farm.

The strawberry fruit yield per high tunnel in 2020 ('Chandler') was 721 lbs and in 2021 ('Ruby June') was 756 lbs, for an average output of 739 lbs. This is equivalent to 16,942 lbs/acre or 18,992 kg/ha for comparison with other studies. There is a more than a 30-fold difference between the highest and lowest strawberry yields reported in the literature (**Table 1**). The average yield in this study was lower than the average reported for the USA and the world (**Figure 3**). However, it is comparable to typical yields reported for adjacent states in the southeastern USA, such as Virginia and North Carolina (**Table 1**).

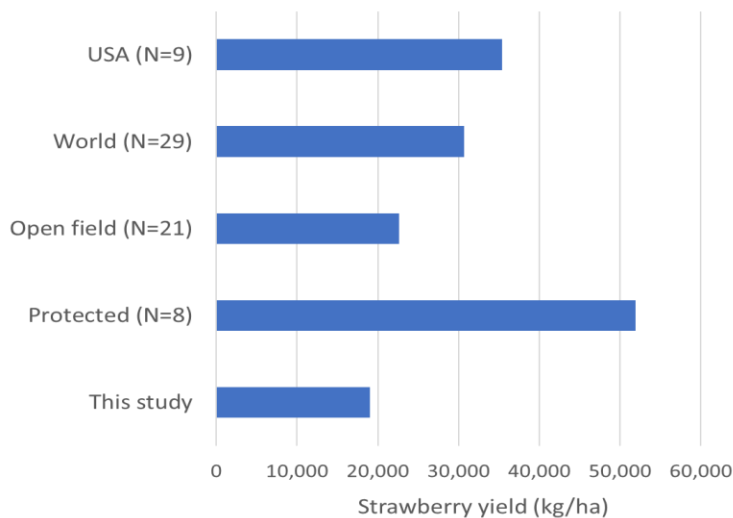

**Figure 3.** Comparison of the average strawberry yield in this study to yields (kg/ha) reported in the USA, world, open field systems, and protected systems using the data reported in Table 1.

The total GHG emissions, calculated using the average yield over the two years, was 0.57 kg CO<sub>2</sub>-eq per kg of strawberry fruit (**Table 4**). Aluminum manufacturing for the frame of the high tunnel accounted for the largest fraction of the total GWP, followed by the actual production activities (including human labor, assessed at 0.7 kg CO<sub>2</sub>-eq per hour), and plastic manufacturing. Combined, these three factors accounted for over 70% of the total GWP. Adding in compost production, use of municipal tap water, and the purchased strawberry plugs (seedlings) brings the fraction of the GWP accounted for up to 90% of the total.

**Table 4.** The global warming potential (GWP) resulting from 1 kg of strawberry fruit produced organically in an unheated high tunnel on the Berea College Farm, 2020-2021.

Impact category	GWP (kg CO <sub>2</sub> -eq)	% of total
Aluminum product manufacturing	0.1714	30.03
Production – direct activities, including labor	0.1611	28.23
Plastics manufacturing	0.0808	14.16
Compost, at plant	0.0421	7.37
Municipal tap water, at user	0.0320	5.61
Strawberry seedlings, for planting	0.0255	4.46
Gasoline produced and combusted, at equipment	0.0153	2.69
Manure, fertilizer, as applied N, at field	0.0149	2.61
Transport, light commercial truck, diesel powered	0.0107	1.87
Extrusion, plastic pipes	0.0041	0.72
Agricultural machinery, general, production	0.0031	0.54
PVC pipe	0.0030	0.52
Compost, nutrient supply from compost	0.0024	0.42
Propane/ butane, at refinery	0.0019	0.33
Cooling operation, reefer	0.0015	0.26
Plastic tunnel construction	0.0004	0.07
Wire drawing, steel	0.0004	0.07
Peat production	0.0002	0.03
Total	0.5706	100.0


There is an even greater range of values reported for GHG emissions than for yields in strawberry production (**Table 2**). In comparison to the values reported in the literature, the system studied here generated lower levels of GHG emissions than might be expected. They were comparable to many of the values reported from the Mediterranean region, regardless of whether they were open-field or protected systems, and lower than those reported for the USA. Thus, despite having yields that were lower than average, this system performed reasonably well compared to the GWP of many other production systems in the USA and around the world (**Figure 4**).

In conclusion, the average strawberry yield in this study over the two-year period (2020-2021) was much lower than highest yields reported for commercial production (for example, California) but comparable to those reported for the southeastern USA. The GHG emissions of 0.57 kg CO<sub>2</sub>-eq per kg of strawberry fruit was lower than the values reported by Tabatabaie and Murthy [2] for four other states in the USA and more similar to those reported for various types of open field and protected production in Spain, Italy, Turkey and Iran (**Table 2**).



Factors that may account for this include the use of an *unheated* high tunnel, the limited use of machinery and fossil fuels, and the absence of synthetic fertilizers.

A breakdown of the components contributing to the GWP of strawberry production in this study suggests that there is not much opportunity to reduce GHG emissions further, beyond obtaining higher yields with the same inputs. For example, eliminating post-harvest refrigerated cooling or sourcing plugs closer to the farm would do relatively little to reduce the overall GWP. Future research should document and assess the GWP of strawberries produced in CEA or PFAL systems in the USA. This will permit comparisons to determine if the performance of such systems is an improvement over production in high tunnels and open fields with respect to GWP.

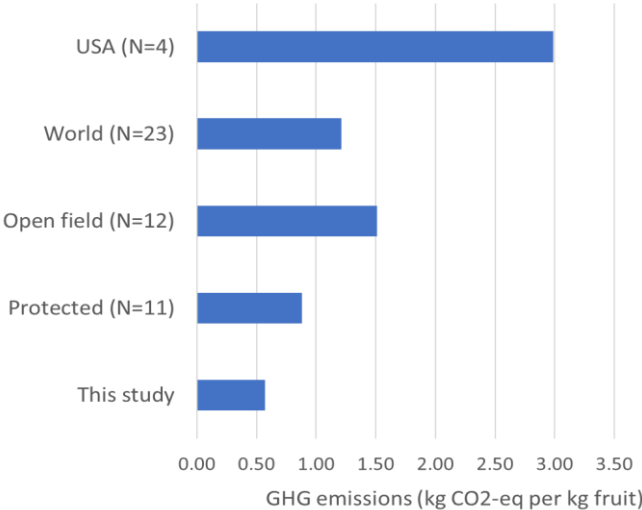

**Figure 4.** Comparison of the greenhouse gas emissions from strawberry production (kg CO<sub>2</sub>-eq per kg fruit) in this study to those reported in the USA, world, open field systems, and protected systems using the data reported in Table 2.

A recent comprehensive review of the environmental impacts of protected vegetable cultivation by Gruda et al. [20] draws from over 100 studies published globally since 1990 and summarizes the findings of dozens of LCAs. They included simple plastic high tunnels [21] on the one hand, such as those found on the Berea College Farm, to high-tech PFALs, usually soilless culture systems with active climate control. The authors concluded that based upon current literature, PFALs have many advantages but a reduction in GWP is not among of them. In fact, they wrote the following about such systems: “A distinguishing feature...is the large amount of energy consumption for heating during the cold season” and that “high amounts of GHG are produced and emitted from such protected cultivation systems.”

The construction of the facility itself contributes significantly to the overall GHG emissions, which must be included in the carbon footprint of the crops grown. The authors write that during “the production of the structure itself (using steel and concrete) high CO<sub>2</sub> emissions are delivered into the atmosphere.” This situation raises serious questions about the environmental costs and benefits of protected crop production; in particular, which practices and technologies can yield larger amounts of food without contributing more GHG emissions and exacerbating the climate crisis. As Gruda et al. [20] conclude, innovative adaptations are needed because currently “protected cultivation has some negative impacts on climate change.”

## Highlights

- The global warming potential (GWP) of organic strawberries grown under high tunnels in Kentucky was assessed using LCA methodology.
- The GWP was 0.57 kg CO<sub>2</sub> per kg of strawberries with the combined impact of the aluminum and plastic manufacturing accounting for 44% of the total and the direct production activities accounting for 28%.
- The average yields of 16,942 lbs/acre or 18,992 kg/ha over the two years (2020-2021) were comparable to those typically reported in the southeastern USA for commercial production but opportunities to increase strawberry yields in high tunnels without increasing inputs should be explored to reduce the GWP.
- Future research should measure the GWP of controlled environment agriculture (CEA) and plant factories with artificial lighting (PFAL) systems to compare the GWP of strawberries grown with these technologies to those of the simple, high tunnel method.

## Funding

This research was funded by The Kentucky Horticulture Council as part of the “Kentucky Small Fruits Expansion Project.”

## Acknowledgments

Assistance with data collection was provided Victor Faluyi and Hallie Whitehead. Janet Meyer facilitated access to the field site and provided management and harvest records. Seyed Hashem Mousavi Avval provided expertise and support with the LCA using SimaPro.

## References

1. Wu, F.; Guan, Z.; and Whidden, A. *Strawberry industry overview and outlook*. IFAS Extension FE 971. University of Florida: Gainesville, FL, USA, 2015; (Reviewed December 2018). Available at: <https://edis.ifas.ufl.edu/fe971> (accessed on 30 June 2021).
2. Tabatabaie, S.M.H.; Murthy. Cradle to farm gate life cycle assessment of strawberry production in the United States. *J. Clean. Prod.* **2016**, *127*, 548-554.
3. Samtani, J.B.; Rom, C.R.; Friedrich, H.; Fennimore, S.A.; Finn, C.E.; Petran, A.; Wallace, R.W.; Pritts, M.P.; Fernandez, G.; Chase, C.A.; Kubota, C. The status and future of the strawberry industry in the United States. *HortTechnology* **2019**, *29*, 11-24.
4. Clark, S. Berea College (1871): The work college legacy. In *Fields of Learning: The Student Farm Movement in North America*; Sayre, L., Clark, S., Eds.; University Press of Kentucky: Lexington, KY, USA, 2011; pp. 31–50.
5. Kaiser, C.; Ernst, M. 2019. *High tunnel strawberries*. CCD-CP-61. Center for Crop Diversification, University of Kentucky College of Agriculture, Food and Environment: Lexington, KY, USA. Available: <http://www.uky.edu/ccd/sites/www.uky.edu/ccd/files/hightunnelstrawberries.pdf> (accessed 30 June 2021).
6. Kateman, B. 2020. Carbon labels are finally coming to the food and beverage industry. *Forbes* (20 July 2020). Available at: <https://www.forbes.com/sites/briankateman/2020/07/20/carbon-labels-are-finally-coming-to-the-food-and-beverage-industry/?sh=4551e4567c03> (accessed 30 June 2021).
7. Karst, T. Measuring carbon footprint becoming more common for produce companies. *The Packer* (14 June 2021). Available at: <https://www.thepacker.com/news/sustainability/measuring-carbon-footprint-becoming-more-common-produce-companies> (accessed 30 June 2021)
8. Leach, A.M.; Emery, K.A.; Gephart, J.; Davis, K.F.; Erisman, J.W.; Leip, A.; et al. Environmental impact food labels combining carbon, nitrogen, and water footprints. *Food Policy* **2016**, *61*, 213-223. <https://doi.org/10.1016/j.foodpol.2016.03.006>
9. Weber C.L.; Matthews H.S. Food-miles and the relative climate impacts of food choices in the United States. *Environ. Sci. Technol.* **2008**, *42*, 3508-3513.

10. Soode-Schimonsky, E.; Richter, K.; and Weber-Blaschke, G. Product environmental footprint of strawberries: Case studies in Estonia and Germany. *J. Environ. Manag.* **2017**, *9*, 564-577.
11. Yildizhan H. Energy, exergy utilization and CO<sub>2</sub> emission of strawberry production in greenhouse and open field. *Energy* **2018**, *143*, 417-423.
12. Khoshnevisan, B.; Rafiee, S.; Mousazadeh, H. Environmental impact assessment of open field and greenhouse strawberry production. *Eur. J. Agron.* **2013**, *50*, 29-37.
13. Mordini, M.; Nemecek, T.; Gaillard, G. *Carbon and Water Footprint of Oranges and Strawberries—A Literature Review*; Federal Department of Economic Affairs FDEA: Bern, Switzerland, 2009; 26p.
14. Tittarelli, F.; Ceglie, F.G.; Ciaccia, C.; Mimiola, G.; Amodio, M.L.; Colelli, G. Organic strawberry in Mediterranean greenhouse: Effect of different production systems on soil fertility and fruit quality. *Renew. Agric. Food Syst.* **2017**, *32*, 485–497.
15. Valiante, D.; Sirtori, I.; Cossa, S.; Corengia, L.; Pedretti, M.; Cavallaro, L.; Vignoli, L.; Galvagni, A.; Gomarasca, S.; Pesce, G.R.; et al. Environmental impact of strawberry production in Italy and Switzerland with different cultivation practices. *Sci. Total Environ.* **2019**, *664*, 249-261.
16. Soode, E.; Lampert, P.; Weber-Blaschke, G.; Richter, K. Carbon footprints of the horticultural products strawberries, asparagus, roses and orchids in Germany. *J. Clean. Prod.* **2015**, *87*, 168–179.
17. Romero-Gómez, M.; Suárez-Rey, E.M. Environmental footprint of cultivating strawberry in Spain. *Int. J. Life Cycle Assess.* **2020**, *25*, 719–732.
18. PRé Consultants, SimaPro 8.4. Software, 2015.
19. LTS. DATASMART LCI Package. 2021. <https://ltsexperts.com/services/software/datasmart-life-cycle-inventory/>.
20. Gruda, N.; Bisbis, M.B.; Tanny, J. Impacts of protected vegetable cultivation on climate change and adaptation strategies for cleaner production—A review. *J. Clean. Prod.* **2019**, *225*, 324–339.
21. Lamont W.J. Overview of the use of high tunnels worldwide. *HortTechnology* **2009**, *19*, 25-29.